

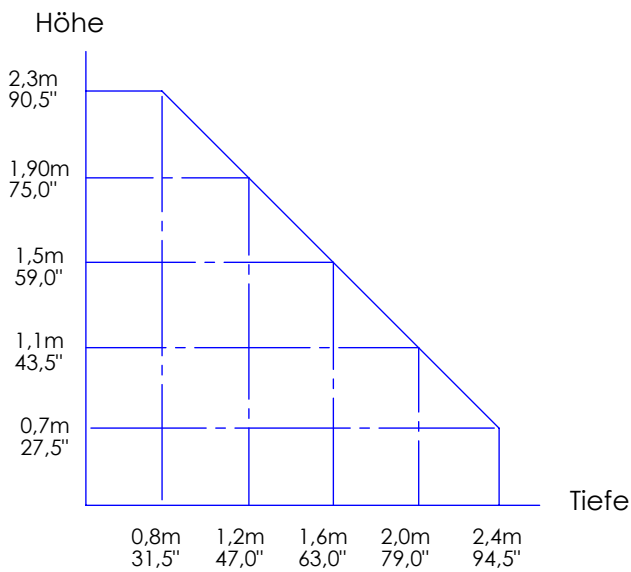
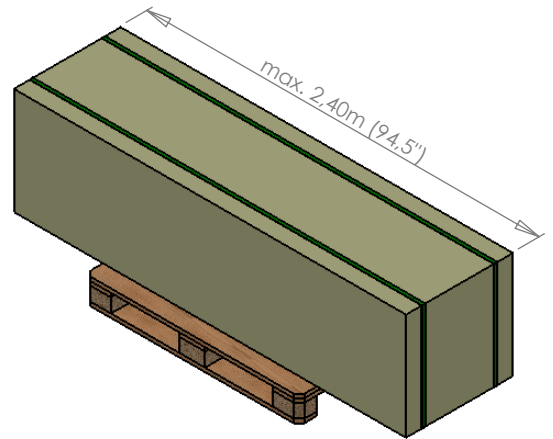


Maximale Palettenabmessungen die mit ErgoPack umreift werden können

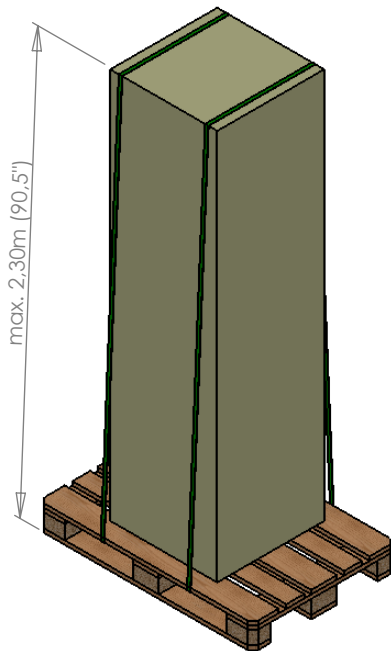

| Palettentiefe | Palettenhöhe |
|---------------|---------------|
| 0,8m (31,5") | 2,3m (90,5") |
| 1,0m (39,5") | 2,10m (82,5") |
| 1,2m (47,0") | 1,9m (75,0") |
| 1,4m (55,0") | 1,7m (67,0") |
| 1,6m (63,0") | 1,5m (59,0") |
| 1,8m (71,0") | 1,3m (51,0") |
| 2,0m (79,0") | 1,1m (43,5") |
| 2,4m (94,5") | 0,7m (27,5") |

Mindestabmessungen für den "Standard" Umlenkschlitten

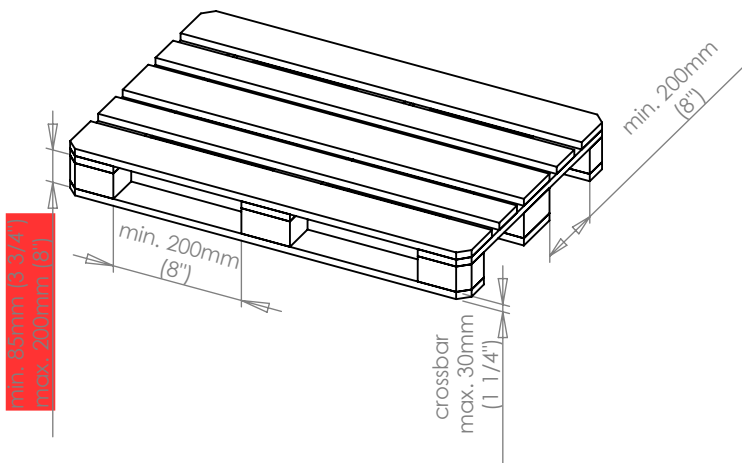

Mindestabmessungen für den "US-Umlenkschlitten"

